




**VISUAL
MAGIC
WORLD**
维曼

P1.25 - COB (Common Cathode) F2 Pro/Indoor Fixed LED Display

Specification

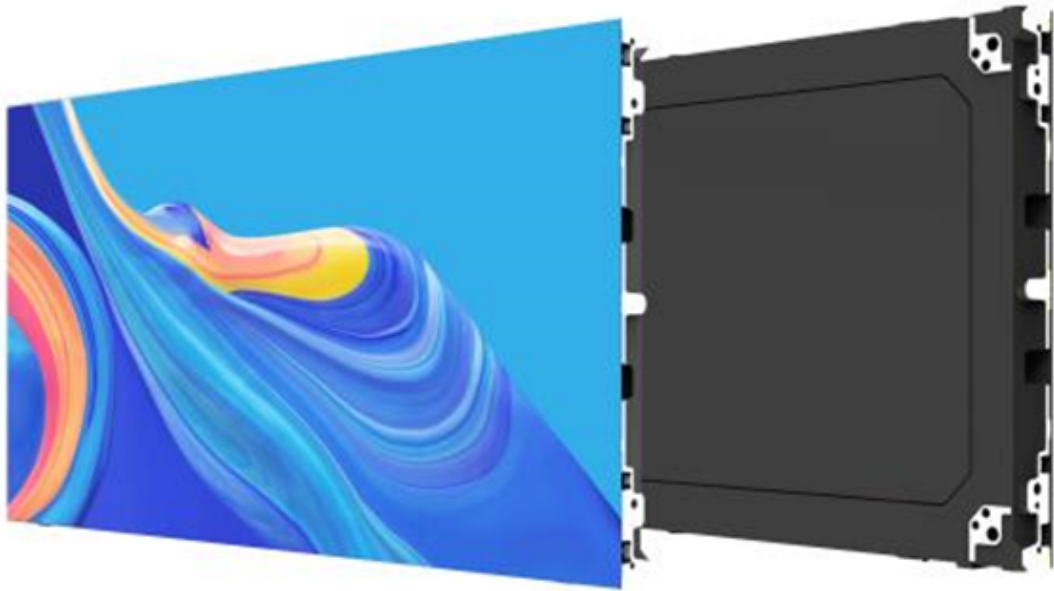

High Contrast Ratio



High Grey Scale



High Refresh Rate



Front Maintenance



Light-Thin Design



16:9 Golden Display Scale

Technical Parameters

Basic Parameters

Parameter	Value
Pixel Pitch (mm)	1.25
Pixel Configuration	COB 1R1G1B
Brightness (nits)	≥600
Grey Scale (bit)	14
Refresh Rate (Hz)	3840
Frame Rate (Hz)	50 / 60
Driving Method	Constant Current Drive (1/60)
Viewing Angle (V/H°)	160/160
Color Temperature (K)	2000-10000
Brightness/Chromaticity Uniformity	98%
Contrast Ratio	10000:1
Module Size (mm)	300×168.75
Module Resolution (W×H)	240×135
Pixel Density (dot/m ²)	640000
Module Weight (kg)	0.3±0.05



Cabinet Parameters

Parameter	Value
Cabinet Assembly (W×H)	2×2
Cabinet Resolution (W×H)	480×270
Cabinet Size (mm)	600×337.5×32.9
Cabinet Weight (kg)	3.6±0.3
Cabinet Flatness (mm)	≤0.2
Maintenance Method	Pre Maintenance
Cabinet Material	Die-casting Aluminum
Protection Level	IP30
Maximum Power Consumption (W/m ²)	≤300
Average Power Consumption (W/m ²)	≤100
Power Supply Requirement	AC100—240V,50-60Hz
Life Time (hrs)	≥100000
Operating Temperature (°C)	-10°C~+45°C
Storage Temperature (°C)	-20°C~+55°C
Operating /Humidity (RH)	10%RH~80%RH
Storage Humidity (RH)	10%RH~85%RH

Note: The above specification parameters are reference values. The actual use may be slightly different due to product batch differences, configuration differences and operating environment. The actual use shall prevail.